



PAVEMENT WIDTH INDICATED ON
TYPICAL STREET SECTIONS TO
BE MEASURED TO THIS POINT

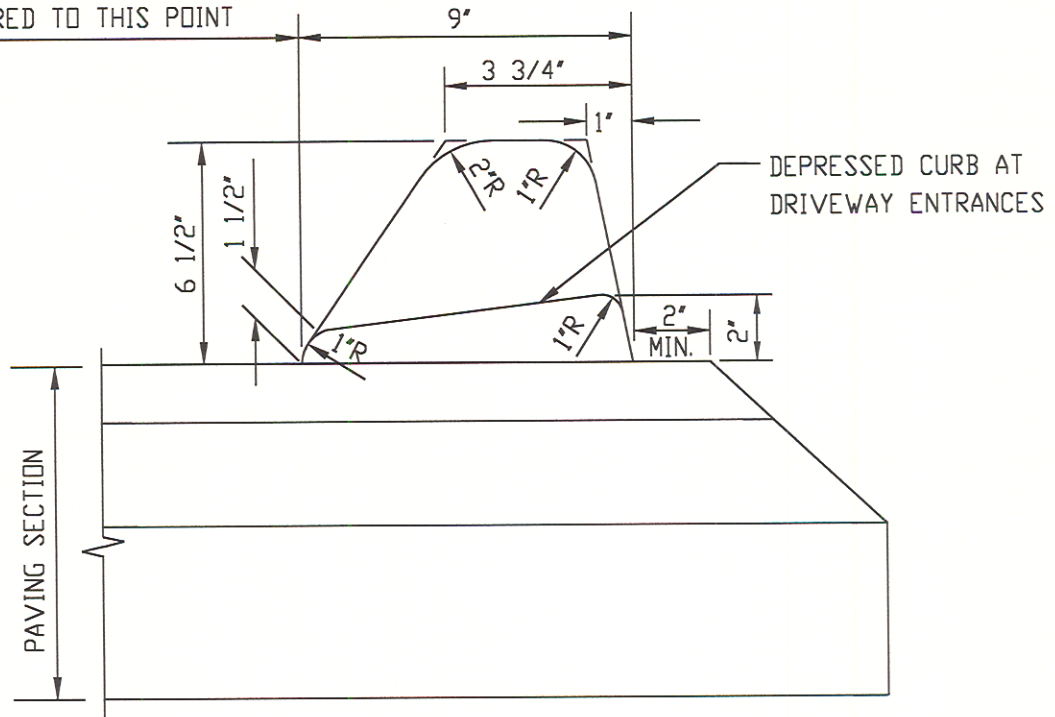

STANDARD BITUMINOUS CURB

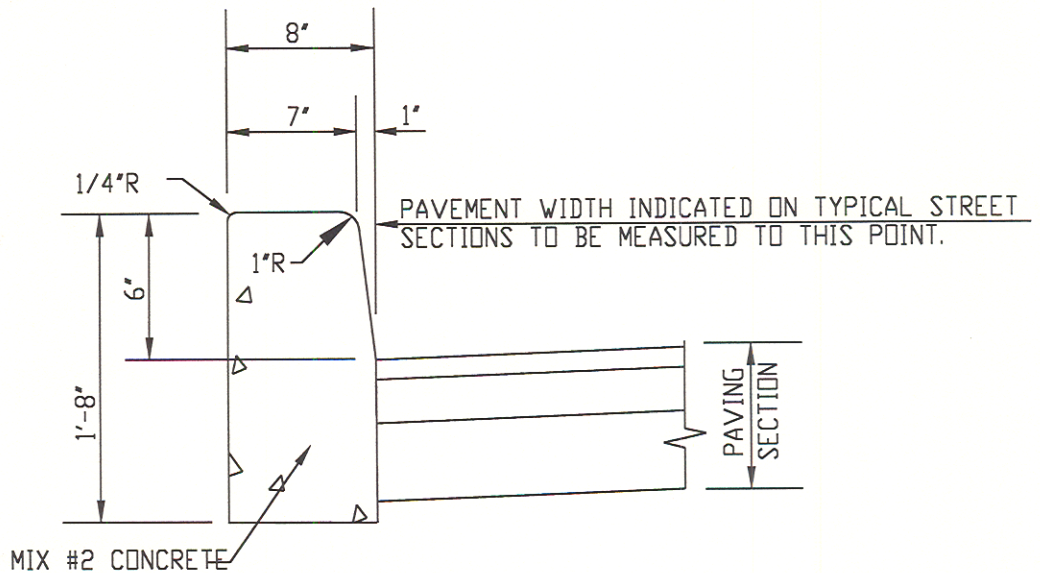

STANDARD BARRIER CURB

NOTES:

1. MAX JOINT SPACING FOR STANDARD CURB - 10'
2. SEE SPECIFICATIONS FOR LOCATION AND DESCRIPTION OF TREATMENT FOR THE TYPES OF JOINTS USED.

CHARLES COUNTY GOVERNMENT

DEPARTMENT OF PLANNING & GROWTH MANAGEMENT

APPROVED:

[Signature]
HIGHWAY ENGINEER

CHIEF OF DEVELOPMENT & CAPITAL SERVICES

DATE

11/19/99

DATE

STANDARD DETAIL

STANDARD CURBS

REVISIONS:

R
2.23